



# SonicWall Gen 7 NSa Series

SonicWall Generation 7 (Gen 7) Network Security Appliance (NS*a*) next-generation firewalls (NGFWs) offers medium- to large-sized enterprises industry-leading performance at the lowest total cost of ownership in their class.

With comprehensive security features such as intrusion prevention, VPN, application control, malware analysis, URL filtering and IP reputation services, it protects the perimeter from advanced threats without becoming a bottleneck.



#### Gen 7 NSa Series Spec Preview. View full specs »



#### HIGHLIGHTS

- 1 RU Form Factor
- Multiple 1 GbE and 10 GbE interfaces
- Multi-gigabit Threat and Malware Analysis Throughput
- Enterprise Internet Edge Ready
- Latest Generation 7 SonicOS support
- Secure SD-WAN capability
- Intuitive single pane of glass management
- TLS 1.3 support
- Best-in-class price-performance
- Fast DPI performance
- Low TCO in its class
- High port density for easy networking
- SonicWall Switch, SonicWave Access Point and Capture Client integration
- Redundant power

# Find the right SonicWall solution for your enterprise:

sonicwall.com/products

Featuring a high port density including multiple 1 GbE and 10 GbE ports, the solution supports network and hardware redundancy with high availability, clustering and dual power supplies.

SonicWall Generation 7 (Gen 7) Network Security Appliance (NSa) next-generation firewalls (NGFWs) offers medium- to large-sized enterprises industry-leading performance at the lowest total cost of ownership in their class.

With comprehensive security features such as intrusion prevention, VPN, application control, malware analysis, URL filtering and IP reputation services, it protects the perimeter from advanced threats without becoming a bottleneck.

The Gen 7 NSa Series has been built from the ground up with the latest hardware components, all designed to deliver multi-gigabit threat prevention throughput — even for encrypted traffic. Featuring a high port density including multiple 1 GbE and 10 GbE ports, the solution supports network and hardware redundancy with high availability, clustering and dual power supplies.

#### Generation 7 – SonicOS 7.0 and Security Services

The Gen 7 NSa Series runs on SonicOS 7.0, a new operating system built from the ground up to deliver a modern user interface, intuitive workflows and user-first design principles. SonicOS 7.0 provides multiple features designed to facilitate enterprise-level workflows. It offers easy policy configuration, zero-touch deployment and flexible management — all of which allow enterprises to improve both their security and operational efficiency.

The Gen 7 NSa Series supports advanced networking features, such as SD-WAN, dynamic routing, layer 4-7 clustering and high-speed VPN functionality. In addition to integrating firewall and switch capabilities, the appliance provides a single-pane-of-glass interface to manage both switches and access points.



Built to mitigate the advanced cyberattacks of today and tomorrow, the Gen 7 NSa Series offers access to SonicWall's advanced firewall security services, allowing you to protect your entire IT infrastructure. Solutions and services such as Cloud Application Security, Capture Advanced Threat Protection (ATP) cloud-based sandboxing, Real-Time Deep Memory Inspection (RTDMI<sup>™</sup>) and Reassembly-Free Deep Packet Inspection (RFDPI) — for all traffic including TLS 1.3 — offer comprehensive gateway protection from most stealthy and dangerous malware, including zero-day and encrypted threats.


#### Deployments

The Gen 7 NSa Series has two main deployment options for medium and distributed enterprises:

#### Internet Edge Deployment

In this standard deployment option, the Gen 7 NS*a* Series NGFW protects private networks from malicious traffic coming from the internet, allowing you to:


- Deploy a proven NGFW solution with highest performance and port density (including 10 GbE connectivity) in its class
- Gain visibility and inspect encrypted traffic, including TLS 1.3, to block evasive threats coming from the Internet — all without compromising performance
- Protect your enterprise with integrated security, including malware analysis, cloud app security, URL filtering and reputation services
- Save space and money with an integrated NGFW solution that includes advanced security and networking capabilities
- Reduce complexity and maximize efficiency using a central management system delivered through an intuitive single-pane-of-glass user interface

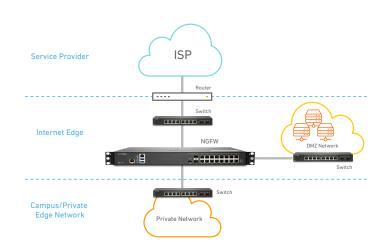

#### **Medium and Distributed Enterprises**


The SonicWall Gen 7 NS*a* Series supports SD-WAN and can be centrally managed, making it an ideal fit for medium and distributed enterprises. This deployment allows organizations to:


- Future-proof against an ever-changing threat landscape by investing in a NGFW with multi-gigabit threat analysis performance
- Provide direct and secure internet access to distributed branch offices instead of back-hauling through corporate headquarters
- Allow distributed branch offices to securely access internal resources in corporate headquarters or in a public cloud, significantly improving application latency
- Automatically block threats that use encrypted protocols such as TLS 1.3, securing networks from the most advanced attacks.
- Reduce complexity and maximize efficiency using a central management system delivered through an intuitive single pane of glass user interface
- Leverage high port density that includes 10 GbE connectivity to support a distributed enterprise and wide area networks

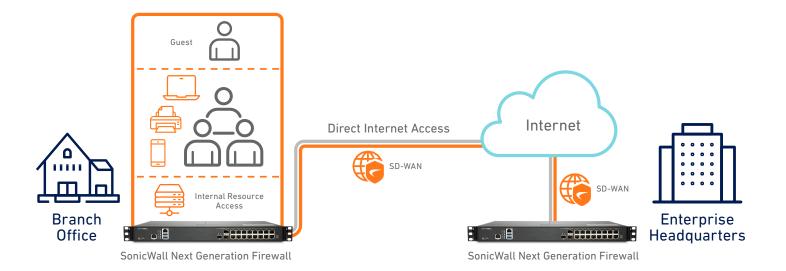



#### SonicWall Gen 7 NSa Series

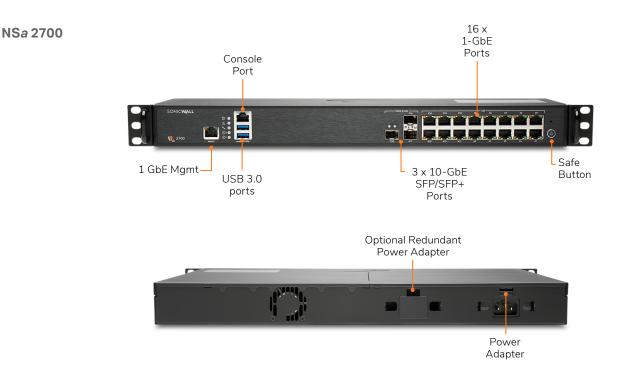

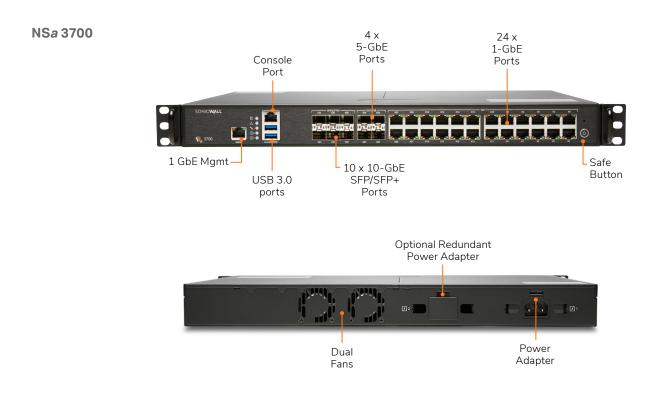



#### Gen 7 NSa Series System Specifications

| Firewall  | NSa 2700  | NSa 3700  |
|---|---|---|
| Operating system  | SonicOS 7.0   | SonicOS 7.0.1   |
| Interfaces  | 16x1GbE, 3x10G SFP+, 2 USB 3.0, 1 Console,<br>1 Management port   | 24x1GbE, 6x10G SFP+, 4x5G SFP+,<br>2 USB 3.0, 1 Console, 1 Mgmt. port |
| Storage   | 64GB M.2  | 128GB M.2   |
| Expansion   | Storage Expansion Slot (Up to 256GB)  | Storage Expansion Slot (Up to 256GB)                                  |
| VLAN interfaces   | 256   | 256   |
| Access points supported<br>(maximum)                                | 32  | 32  |
| Firewall/VPN Performance  |   |   |
| Firewall inspection throughput <sup>1</sup>                         | 5.2 Gbps  | 5.5 Gbps  |
| Threat Prevention throughput <sup>2</sup>                           | 3.0 Gbps  | 3.5 Gbps  |
| Application inspection throughput <sup>2</sup>                      | 3.6 Gbps  | 4.2 Gbps  |
| IPS throughput <sup>2</sup>   | 3.4 Gbps  | 3.8 Gbps  |
| Anti-malware inspection throughput <sup>2</sup>                     | 2.9 Gbps  | 3.5 Gbps  |
| TLS/SSL inspection and decryption throughput (DPI SSL) <sup>2</sup> | 800 Mbps  | 850 Mbps  |
| IPSec VPN throughput <sup>3</sup>                                   | 2.10 Gbps   | 2.2 Gbps  |
| Connections per second  | 21,500  | 22,500  |
| Maximum Connections (SPI)   | 1,500,000   | 2,000,000   |
| MAX DPI-SSL Connections   | 125,000   | 150,000   |
| Maximum connections (DPI)   | 500,000   | 750,000   |
| VPN   |   |   |
| Site-to-site VPN tunnels  | 2,000   | 3,000   |
| IPSec VPN clients (max)   | 50 (1000)   | 50 (1000)   |
| SSL VPN licenses (max)  | 2 (500)   | 2 (500)   |
| Encryption/Authentication   | DES, 3DES, AES (128, 192, 256-bit)/MD5, SHA-1, Suite B Cryptography   |   |
| Key exchange  | Diffie Hellman Groups 1, 2, 5, 14v  |   |
| Route-based VPN   | RIP, OSPF, BGP  |   |
| Certificate support   | Verisign, Thawte, Cybertrust, RSA Keon, Entrust and Microsoft CA for SonicWall-to- SonicWall VPN, SCEP  |   |
| VPN features  | Dead Peer Detection, DHCP Over VPN, IPSec NAT Traversal, Redundant VPN Gateway, Route-based VPN   |   |
| Global VPN client platforms supported                               | Microsoft® Windows Vista 32/64-bit, Windows 7 32/64-bit, Windows 8.0 32/64-bit,<br>Windows 8.1 32/64-bit, Windows 10  |   |
| NetExtender   | Microsoft Windows Vista 32/64-bit, Windows 7, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit,<br>Mac OS X 10.4+, Linux FC3+/Ubuntu 7+/OpenSUSE                    |   |
| Mobile Connect  | Apple® iOS, Mac OS X, Google® Android™, Kindle Fire, Chrome, Windows 8.1 (Embedded)   |   |
| Security services   |   |   |
| Deep Packet Inspection services                                     | Gateway Anti-Virus, Anti-Spyware  | e, Intrusion Prevention, DPI SSL                                      |
| Content Filtering Service (CFS)                                     | HTTP URL, HTTPS IP, keyword and content scanning, Comprehensive filtering based on file types such<br>as ActiveX, Java, Cookies for privacy, allow/forbid lists |   |
| Comprehensive Anti-Spam<br>Service                                  | Supported   |   |
| Application Visualization   | Yes   |   |
| Application Control   | Yes   |   |
| Capture Advanced Threat<br>Protection                               | Yes   |   |
| Networking  |   |   |
| IP address assignment   | Static (DHCP, PPPoE, L2TP and PPTP client), Internal DHCP server, DHCP relay  |   |
| NAT modes   | 1:1, 1:many, many:1, many:many, flexible NAT (overlapping IPs), PAT, transparent mode   |   |
| Routing protocols   | BGP4, OSPF, RIPv1/v2, static routes, policy-based routing   |   |

#### Gen 7 NSa Series System Specifications

| Firewall                        | NSa 2700   | NSa 3700   |
|---------------------------------|--|--|
| QoS                             | Bandwidth priority, max bandwidth, guaranteed bandwidth, DSCP marking, 802.1e (WMM)  |  |
| Authentication                  | LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database, Terminal Services, Citrix<br>Common Access Card (CAC)                    |  |
| Local user database             | 250  |  |
| VoIP                            | Full H323-v1-5, SIP  |  |
| Standards                       | TCP/IP, UDP, ICMP, HTTP, HTTPS, IPSec, ISAKMP/IKE, SNMP, DHCP, PPPoE, L2TP, PPTP, RADIUS, IEEE 802.3   |  |
| Certifications (pending)        | FIPS 140-2 (with Suite B) Level 2, UC APL, VPNC, IPv6 (Phase 2), ICSA Network Firewall, ICSA Anti-virus,<br>Common Criteria NDPP (Firewall and IPS)  |  |
| Common Access Card (CAC)        | Supported  |  |
| High availability               | Active/Passive with stateful synchronization   |  |
| Hardware                        |  |  |
| Form factor                     | 1U Rack Mountable  | 1U Rack Mountable  |
| Power supply                    | 60W  | 90W  |
| Maximum power consumption (W)   | 21.5   | 36.3   |
| Input power                     | 100-240 VAC, 50-60 Hz  | 100-240 VAC, 50-60 Hz  |
| Total heat dissipation          | 73.32 BTU  | 123.78 BTU   |
| Dimensions                      | 43 x 32.5 x 4.5 (cm) 16.9 x 12.8 x 1.8 in  | 43 x 32.5 x 4.5 (cm) 16.9 x 12.8 x 1.8 in  |
| Weight                          | 4.0 kg / 8.8 lbs   | 4.6 kg / 10.2 lbs  |
| WEEE weight                     | 4.2 kg / 9.3 lbs   | 4.8 kg / 10.6 lbs  |
| Shipping weight                 | 6.4 kg / 14.1 lbs  | 7 kg / 15.4lbs   |
| Environment (Operating/Storage) | 32°-105° F (0°-40° C)/-40° to 158° F (-40° to 70° C)   | 5-95% non-condensing   |
| Humidity                        | 5-95% non-condensing   | 5-95% non-condensing   |
| Hardware                        |  |  |
| Major regulatory compliance     | FCC Class A, CE (EMC, LVD, RoHS), C-Tick, VCCI<br>Class A, MSIP/KCC Class A, UL, cUL, TUV/GS, CB,<br>Mexico CoC by UL,<br>WEEE , REACH, ANATEL, BSMI | FCC Class A, CE (EMC, LVD, RoHS), C-Tick, VCCI<br>Class A, MSIP/KCC Class A, UL, cUL, TUV/GS, CB,<br>Mexico CoC by UL,<br>WEEE , REACH, ANATEL, BSMI |

1. Testing Methodologies: Maximum performance based on RFC 2544 (for firewall). Actual performance may vary depending on network conditions and activated services. 2. Threat Prevention/GatewayAV/Anti-Spyware/IPS throughput measured using industry standard Spirent WebAvalanche HTTP performance test and Ixia test tools. Testing done with multiple flows through multiple port pairs. Threat Prevention throughput measured with Gateway AV, Anti-Spyware, IPS and Application Control enabled. 3. VPN throughput measured using UDP traffic at 1280 byte packet size adhering to RFC 2544. All specifications, features and availability are subject to change.

### – PARTNER ENABLED SERVICES -

Need help to plan, deploy or optimize your SonicWall solution? SonicWall Advanced Services Partners are trained to provide you with world class professional services. Learn more at:

www.sonicwall.com/PES

#### SonicOS 7.0 Feature Summary

#### Firewall

- Stateful packet inspection
- Reassembly-Free Deep
  Packet Inspection
- DDoS attack protection (UDP/ ICMP/SYN flood)
- IPv4/IPv6 support
- Biometric authentication for remote access
- DNS proxy
- Full API support
- SonicWall Switch integration
- SD-WAN scalability
- SD-WAN Usability Wizard<sup>1</sup>
- SonicCoreX and SonicOS containerization<sup>1</sup>
- Connections scalability
  (SPI, DPI, DPI SSL)
- Enhanced dashboard<sup>1</sup>
- Enhanced device view
- Top traffic and user summary
- Insights to threats
- Notification center

## TLS/SSL/SSH decryption and inspection

- TLS 1.3 with enhanced security<sup>1</sup>
- Deep packet inspection
  for TLS/SSL/SSH
- Inclusion/exclusion of objects, groups or hostnames
- SSL control
- Enhancements for DPI-SSL with CFS
- Granular DPI SSL controls per zone or rule
- Capture advanced threat protection<sup>2</sup>
- Real-Time Deep Memory Inspection
- Cloud-based multi-engine analysis
- Virtualized sandboxing
- Hypervisor level analysis
- Full system emulation
- Broad file type examination
- Automated and manual submission
- Real-time threat intelligence updates
- Block until verdict
- Capture Client

7

#### Intrusion prevention<sup>2</sup>

- Signature-based scanning
- Automatic signature updates
- Bi-directional inspection
- Granular IPS rule capability

SonicWall Gen 7 NSa Series

- GeoIP enforcement
- Botnet filtering with dynamic list
- Regular expression matching

#### Anti-malware<sup>2</sup>

- Stream-based malware scanning
- Gateway anti-virus
- Gateway anti-spyware
- Bi-directional inspection
- No file size limitation
- Cloud malware database

#### Application identification<sup>2</sup>

- Application control
- Application bandwidth management
- Custom application signature creation
- Data leakage prevention
- Application reporting over NetFlow/IPFIX
- Comprehensive application
  signature database

#### Traffic visualization and analytics

- User activity
- Application/bandwidth/threat usage
- Cloud-based analytics

### HTTP/HTTPS Web content filtering<sup>2</sup>

- URL filtering
- Proxy avoidance
- Keyword blocking
- Policy-based filtering (exclusion/inclusion)
- HTTP header insertion
- Bandwidth manage CFS rating categories
- Unified policy model with app control
- Content Filtering Client

#### VPN

- Secure SD-WAN
- Auto-provision VPN
- IPSec VPN for site-to-site connectivity
- SSL VPN and IPSec client remote access
- Redundant VPN gateway
- Mobile Connect for iOS, Mac OS X, Windows, Chrome, Android and Kindle Fire
- Route-based VPN (OSPF, RIP, BGP)

#### Networking

- PortShield
- Jumbo frames
- Path MTU discovery
- Enhanced logging
- VLAN trunking
- Port mirroring (NSa 2650 and above)
- Layer-2 QoS
- Port security
- Dynamic routing (RIP/OSPF/BGP)
- SonicWall wireless controller
- Policy-based routing (ToS/ metric and ECMP)

#### • NAT

•

VoIP

- DHCP server
- Bandwidth management
- A/P high availability with state sync
- Inbound/outbound load balancing
- High availability Active/Standby with state sync
- L2 bridge, wire/virtual wire mode, tap mode, NAT mode

Common Access Card (CAC) support

Asymmetric routing

Granular QoS control

DPI for VoIP traffic

SIP proxy support

Capture Security

and support

Bandwidth management

H.323 gatekeeper and

Management, monitoring

Appliance (CSa) support

New design or template

Industry and global

Dashboard

.

Topology view

Simplified policy

Used vs Un-used

Active vs Inactive

Storage support<sup>1</sup>

creation and management

Global search for static data

Policy/Objects usage statistics1

average comparison

Capture Threat Assessment (CTA) v2.0

New UI/UX, Intuitive feature layout<sup>1</sup>

Device information, application, threats

SONICWALL

#### SonicOS 7.0 Feature Summary cont'd

- Internal and external storage management<sup>1</sup>
- WWAN USB card support (5G/LTE/4G/3G)
- Network Security Manager (NSM) support
- Web GUI
- Command line interface (CLI)
- Zero-Touch registration & provisioning
- CSC Simple Reporting<sup>1</sup>
- SonicExpress mobile app support
- SNMPv2/v3
- Centralized management and reporting with SonicWall Global Management System (GMS)<sup>2</sup>
- Logging
- Netflow/IPFix exporting
- Cloud-based configuration backup •
- BlueCoat security analytics platform
- Application and bandwidth visualization •
- IPv4 and IPv6 management
- CD management screen
- Dell N-Series and X-Series switch management including cascaded switches

#### **Debugging and diagnostics**

- Enhanced packet monitoring
- SSH terminal on UI

#### Wireless

- SonicWave AP cloud management
- WIDS/WIPS
- Rogue AP prevention
- Fast roaming (802.11k/r/v)
- 802.11s mesh networking
- Auto-channel selection
- RF spectrum analysis
- Floor plan view
- Topology view
- Band steering
- Beamforming
- AirTime fairness
- Bluetooth Low Energy
- MiFi extender
- RF enhancements and improvements
- Guest cyclic quota

<sup>1</sup> New feature, available on SonicOS 7.0 <sup>2</sup> Requires added subscription

### Learn more about SonicWall Gen 7 NSa Series

www.sonicwall.com/products/firewalls

#### About SonicWall

SonicWall delivers Boundless Cybersecurity for the hyper-distributed era and a work reality where everyone is remote, mobile and unsecure. By knowing the unknown, providing real-time visibility and enabling breakthrough economics, SonicWall closes the cybersecurity business gap for enterprises, governments and SMBs worldwide. For more information, visit www.sonicwall.com or follow us on Twitter, LinkedIn, Facebook and Instagram.

#### SonicWall, Inc.

1033 McCarthy Boulevard | Milpitas, CA 95035 Refer to our website for additional information. www.sonicwall.com

#### © 2021 SonicWall Inc. ALL RIGHTS RESERVED.

SonicWall is a trademark or registered trademark of SonicWall Inc. and/or its affiliates in the U.S.A. and/or other countries. All other trademarks and registered trademarks are property of their respective owners. The information in this document is provided in connection with SonicWall Inc. and/or its affiliates' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of SonicWall products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, SONICWALL AND/OR ITS AFFILIATES ASSUME NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON- INFRINGEMENT. IN NO EVENT SHALL SONICWALL AND/OR ITS AFFILIATES BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF SONICWALL AND/OR ITS AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SonicWall and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. SonicWall Inc. and/or its affiliates do not make any commitment to update the information contained in this document.

### SONICWALL

